


pregip

100

Ready mixed hand applied
gypsum based undercoat
plaster for interiors

Lightweight product with perlite

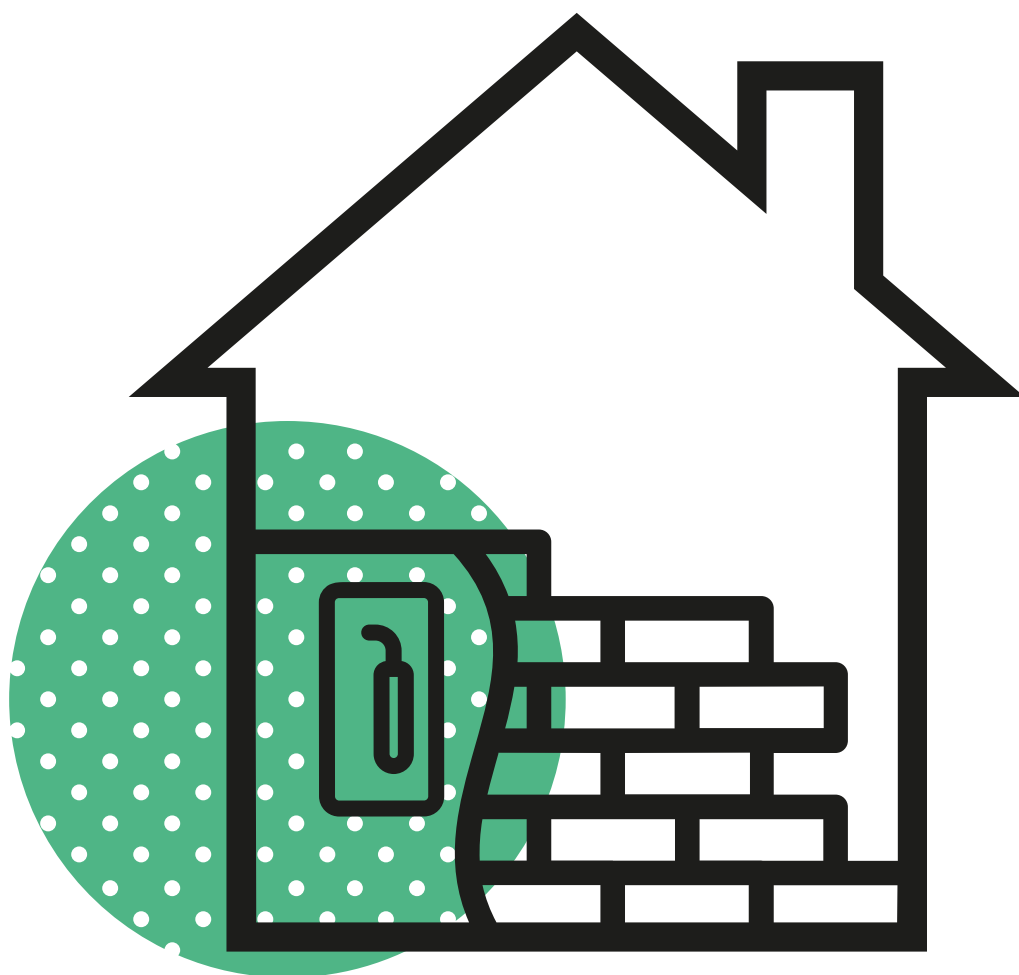

Pregip 100

Ready mixed hand applied gypsum based undercoat plaster for interiors



TECHNICAL FEATURES

Compliant with UNI EN 13279 - B4/20/2 class 1



Theoretical yield	~ 8 Kg/m ² for 1 cm thick
Apparent specific weight	~ 540 Kg/m ³ (free-fall)
Specific weight applied dry	~ 750 Kg/m ³
Mixing water	55÷60% (~18 lt/bags of 25 Kg)
Ph	Alkaline
Start taking	~ 90 min
Permeability to vapor	$\mu \leq 7$
Thermal conductivity	$\lambda = 0,13$ W/mK (measured value)
Resistance to fire	EI 120 thickness of 1,5 cm
Reaction to fire	A1 class
Compressive strength	≥ 2 N/mm ²
Flexural strength	$\geq 0,8$ N/mm ²
Adhesion to the support	$\geq 0,16$ N/mm ²

Laboratory tests carried out at + 20°C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

Mix the product with water in a clean container using a trowel or drill mixer attachment at low speed until obtaining a smooth and lump-free paste. The product must be applied by hand, levelled with a feather edge or spatula, smoothed with a float, and then given a perfect mirror finish with a skim coat (such as Intofin – Intofin Plus - Rasofin Plus). **The product is especially suitable for jobs that call for rapid application.**



WARNINGS

Do not add additives or aggregates of any kind.
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.
Do not apply at temperatures below + 5 ° C or above + 35 ° C.
Do not apply on wooden or metal substrates not previously treated with Primer Gps.
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25. Also available in bulk.

*The above information is to be considered indicative, non-binding and subject to change without notice.
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.*