


ringip

Ready mixed mortar based on cement and hydrated lime, for use as dash coat



CEMENT-BASED | PLASTERS

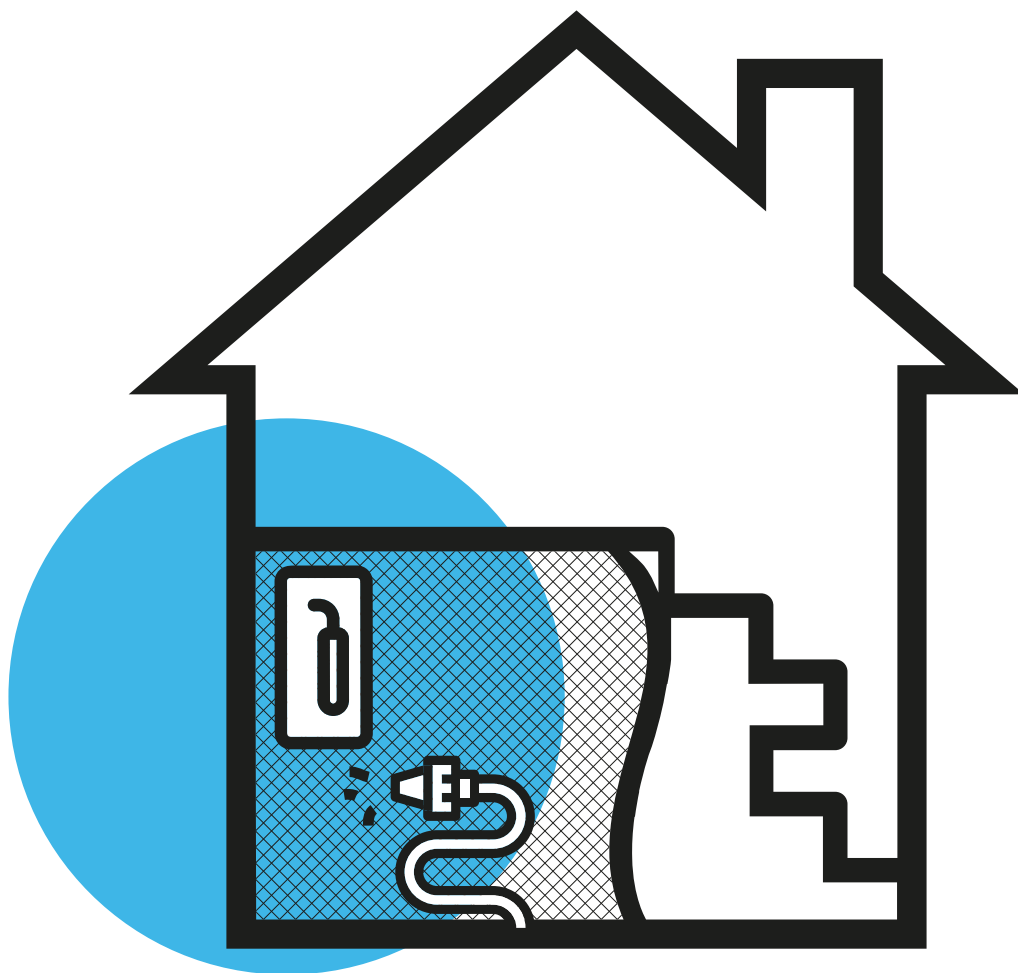

Ringip

Ready mixed mortar based on cement and hydrated lime, for use as dash coat




TECHNICAL FEATURES

Compliant with UNI EN 998 - 1



Theoretical yield	~ 14 Kg/m ² for 1 cm thick
Apparent specific weight	~ 1500 Kg/m ³
Granulometry	≤ 1,5 mm
Mixing water	30/40%
Reaction to fire	A1 class
Thickness applied	1÷2 mm for stratum
Adhesion to the support	≥ 0,7 N/mm ²

Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

Hand: mix the product with clean water using a low speed whisk mixer, blending until any lumps disappear. Apply in a single coat with a metal trowel on a clean substrate free of dust and dirt and well wetted.

By machine: dose the mixing water for a pasty consistency and apply on a clean, well wetted substrate.



WARNINGS

Do not add additives or aggregates of any kind.

Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.

Do not apply at temperatures below + 5 ° C or above + 35 ° C.

Do not apply on wooden or metal substrates not previously treated with Primer Gps.

Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Bags of kg. 25.

The above information is to be considered indicative, non-binding and subject to change without notice.

Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.