
tonacem Beadv mixed plaster

Ready mixed plaster based on cement and hydrated lime for finishing civil plastering



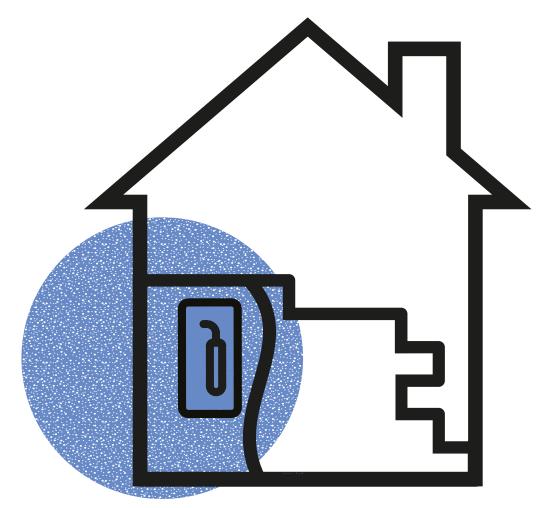

CEMENT-BASED | PLASTERS

Tonacem Grigio

Ready mixed plaster based on cement and hydrated lime for finishing civil plastering



TECHNICAL FEATURES

Compliant with UNI EN 998 - 1

Theoretical yield	~ 1,0-1,2 Kg/m² for 1 mm thick
Apparent specific weight	~ 1000 Kg/m³
Granulometry	≤ 0,7 mm
Mixing water	~ 35%
Start taking	~ 180 min.
Mixture life time	~ 120 min.
Permeability to water vapor (EN 1015-19)	μ < 15
Thermal conductivity $(\lambda_{10, dry})$ (EN 1745)	$\lambda=$ 0,43 W/mK (tabulated value P=50%)
Reaction to fire	A1 class
Recommended application thickness	3-5 mm
Adhesion to the support	≥0,2 N/mm²

Laboratory tests performed at $+ 20^{\circ}$ C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

GIPSOS primer. The product is mixed with clean water using a low speed whisk mixer to obtain a smooth mixture free of lumps. Wait 5 minutes, remix and then apply with a metal trowel to a thickness of about 2 mm per coat up to a maximum depth of 10 mm. After about 30 minutes use a damp sponge trowel to smooth the surface for a "civil grade" smooth finish. After curing the product can be covered with synthetic plaster or paint.



WARNINGS

Do not add additives or aggregates of any kind. Do not apply on inconsistent, dusty or degraded, frozen or wet substrates. Do not apply at temperatures below + 5 ° C or above + 35 ° C. Do not apply in conditions of intense sun, high wind or possible rain. Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25. Colour: Grey

The above information is to be considered indicative, non-binding and subject to change without notice. Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.