
rasocem plus bianco

Ready mixed render white cement-based, fiber-reinforced and water-repellent for concrete



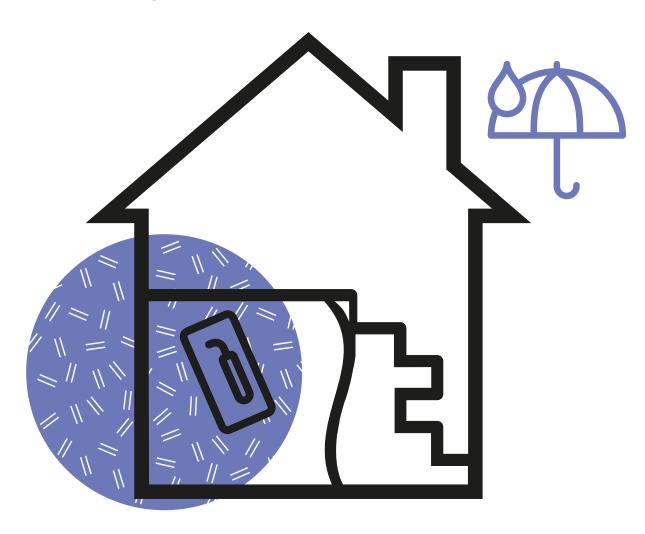

Rasocem Plus Bianco

Ready mixed render white cement-based, fiber-reinforced and water-repellent for concrete



TECHNICAL FEATURES

Compliant with UNI EN 998 - 1



Theoretical yield	~ 1,4 Kg/m² for 1 mm thick
Density mass	~ 1750 Kg/m³
Granulometry	≤ 0,7 mm
Mixing water	25%
Water absorption	W1
Mixture life time	~ 120 min.
Reaction to fire	A1 class
Thermal conductivity	λ= 0.47 W/Mk (tab. val. en 1745:2002)
Resistance to compression	≥ 7 N/mm²
Flexural strength	≥ 3 N/mm²
Adhesion to the support	≥ 0,6 N/mm²

Laboratory tests performed at \pm 20 °C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



METHOD OF USE

Mix and blend the product only with clean water ($\approx 24\%$) to obtain a mixture free of lumps (pasty consistency). Leave the mixture to stand for about 5 minutes and then mix and lay using a steel trowel to a thickness of 1 to 2 mm per coat, on a damp substrate, or wetted if already cured. After about 30 minutes, work the surface with a sponge trowel dampening as required to obtain an even smooth surface, free of joints and bulges.



WARNINGS

Do not add additives or aggregates of any kind.

Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.

Do not apply at temperatures below + 5 ° C or above + 35 ° C.

Do not apply in conditions of intense sun, high wind or possible rain.

Keep the product in the bags intact, on pallets and in a dry and ventilated place.



PACKAGING

Paper bags of kg. 25. Colour: White

The above information is to be considered indicative, non-binding and subject to change without notice.

Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.