


# *rasogrip*

## *white*

Pre-mixed cement-based render, adheres on all supports also non-absorbent ones, it is water-repellent and fiber reinforced.

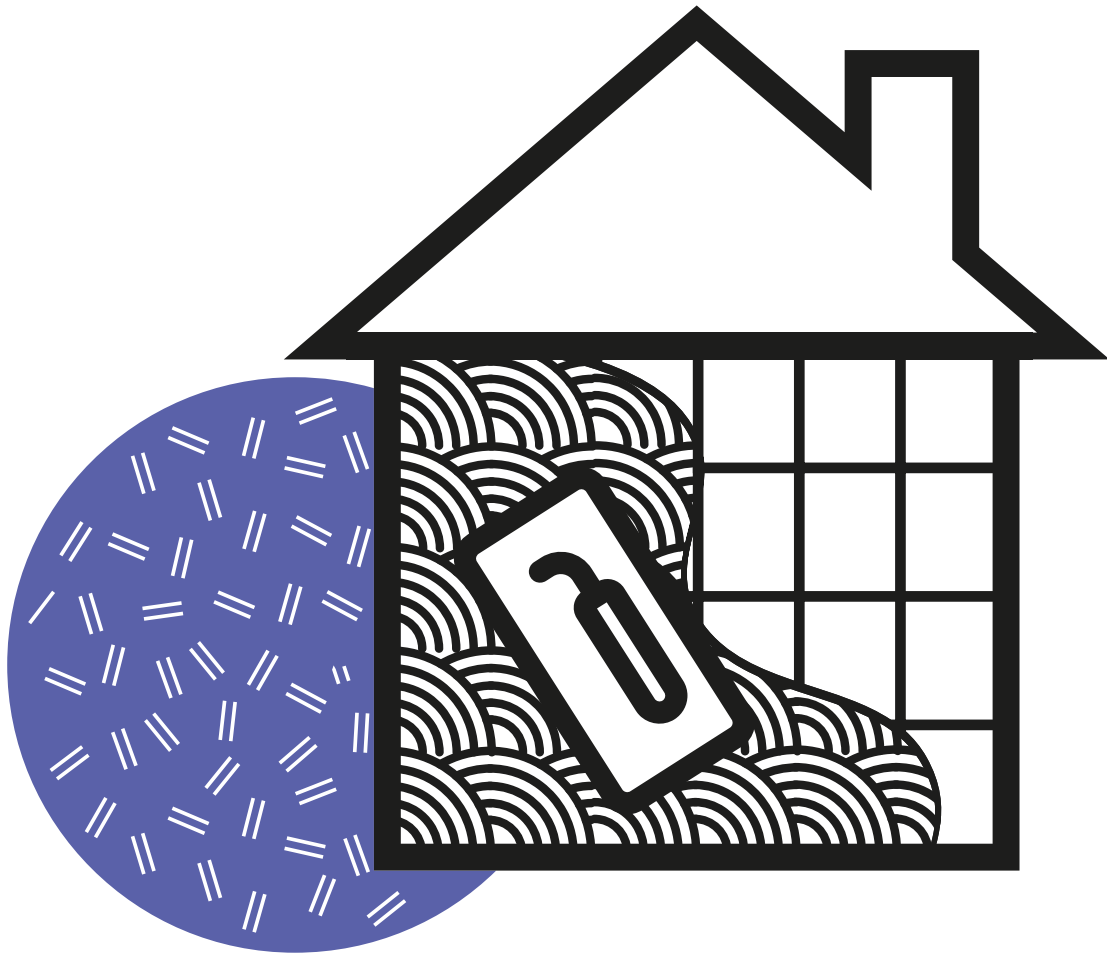

CEMENT BASED | RENDER



**gipsos**  
LA NATURA NEL COSTRUIRE

# Rasogrip

Pre-mixed cement-based render, adheres on all supports also non-absorbent ones, it is water-repellent and fiber reinforced.




## TECHNICAL FEATURES

Compliant with UNI EN 998-1 (2016) and UNI EN 1504-2 (2005)



<b>Theoretical Yield</b>	~ 1,4 Kg/m <sup>2</sup> for 1 mm thick
<b>Apparent specific weight</b>	~ 1370 Kg/m <sup>3</sup> (free-fall)
<b>Mixing water</b>	22% (~5,5 lt/paper bag of da 25)
<b>Ph</b>	Alkaline
<b>Mixture ife time</b>	~ 120 min
<b>Water absorption</b>	W3
<b>Fire resistance</b>	Classe A1
<b>Compressive strength</b>	≥ 7 N/mm <sup>2</sup>
<b>Flexural strength</b>	≥ 3 N/mm <sup>2</sup>
<b>Adhesion to the support</b>	≥ 0,9 N/mm <sup>2</sup>

Laboratory tests performed at + 20 ° C and R.H. 65%, data subject to variations in different atmospheric and installation conditions.



## MODALITÀ D'IMPIEGO

Mix and blend the product only with clean water ( $\approx 22\%$ ) to obtain a mixture free of lumps (pasty consistency). Leave the mixture to stand for about 5 minutes and then mix and lay using a steel trowel to a thickness of 1 to 2 mm per coat, on a damp substrate, or wetted if already cured. After about 30 minutes, work the surface with a sponge trowel dampening as required to obtain an even smooth surface, free of joints and bulges. The finished product lends itself to the subsequent laying of colored coatings or specular



## AVVERTENZE

Do not add additives or aggregates of any kind.  
Do not apply on inconsistent, dusty or degraded, frozen or wet substrates.  
Do not apply at temperatures below + 5 ° C or above + 35 ° C.  
Keep the product in the bags intact, on pallets and in a dry and ventilated place.



## CONFEZIONI

Paper bags of kg. 25. Colour: White

The above information is to be considered indicative, non-binding and subject to change without notice.  
Therefore the suitability of the product for the desired result must be verified by the user, who is fully responsible for its use.